



轮式车辆分动器
两档分动器

Transfer Case with Two-speed
for Wheeled Vehicles



两档分动器

应用范围：
各种军用越野汽车、沙漠油田车、
全路面起重机及其他轮式全驱车辆

Transfer Case with Two-speed

Applications:

Off-road military vehicles, oil field & desert vehicles, all terrain cranes and other all wheel drive vehicles

产品介绍 Special Features

两档分动器以其卓越的品质和性能，满足了各种条件、环境下使用，其明显的优点表现在：Super quality and performance of two-speed transfer cases are suitable for all kinds of applications

- 引进ZF-STEYR技术开发
- 总成承载能力强 High load capacity
- 内置润滑油泵
- 带轴间差速器 With inter-axle differentials
- 气动换挡操纵
- 可外接油冷却器 Oil Cooler can be connected

Developed on the base of transferred technology from Stryr.

Built-in Lubrication Pump
Controlled by Shift cylinder

株洲齿轮有限责任公司
ZHUSHOU GEAR CO., LTD.

ADD: No. 119 Xinhua West Road, Zhuzhou, Hunan, China

电话: 0731-28496383


传真: 0731-28496358

Http://www.chinese-gear.com

轮式车辆分动器 Transfer Cases for Wheeled Vehicles



两档分动器 Transfer Case with Two-speed

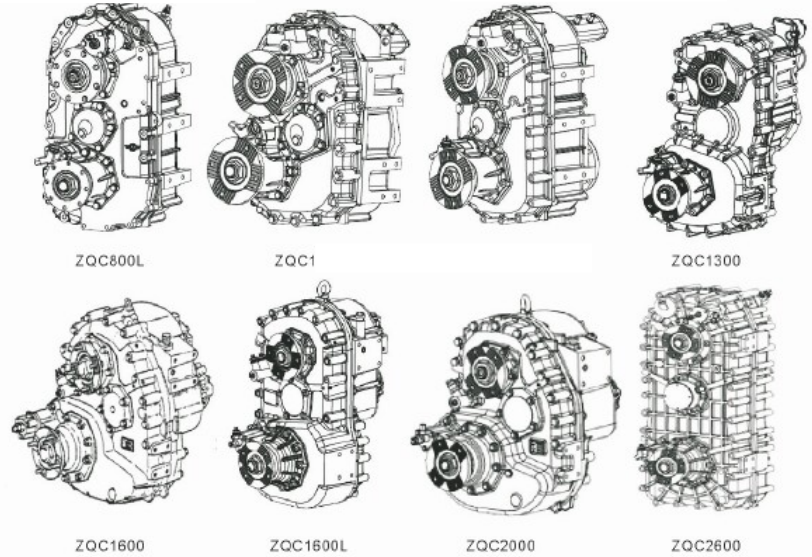

型号	最大输入扭矩	最大输入转速	中心距	速比	分扭比
ZQC800	8000Nm	3000rpm	235mm	高1、低1.5	1:2.21
ZQC800L	8000Nm	3000rpm	310mm	高1、低1.5	1:2.21
ZQC1200	12000Nm	3000rpm	235mm	高1、低1.75或1.285	1:2.39
ZQC1200L	12000Nm	3000rpm	310mm	高1、低1.75或1.285	1:2.39
ZQC1300	13000Nm	2800rpm	348mm	高0.88或1.01、低1.52	1:2.21
ZQC1600	18000Nm	2800rpm	300mm	高0.89、低1.536	1:2.7或1:2.21
ZQC1600L	18000Nm	2800rpm	396mm	高0.89、低1.536	1:2.7或1:2.21
ZQC2000	25000Nm	2800rpm	300mm	高0.89、低1.536	1:2.7或1:3
ZQC2000L	25000Nm	2800rpm	396mm	高0.89、低1.536	1:2.7或1:3
ZQC2600	30000Nm	2400rpm	625mm	高0.8、低1.75	1:2.13
ZQC2800	25000Nm	2800rpm	400mm	高1.11、低2.37	1:2.13
ZQC3000	30000Nm	2800rpm	400mm	高0.91、低1.41	1:2.27
ZQC3750	38000Nm	2500rpm	750mm	高0.8、低1.83	1:2.13